


FX UV BLOCK COATING

PROJECT:	CONTACT:
FIXTURE/WATTAGE/BEAMSPREAD:	
LOCATION:	LENS SIZE:
ACCESSORIES:	COLOR:

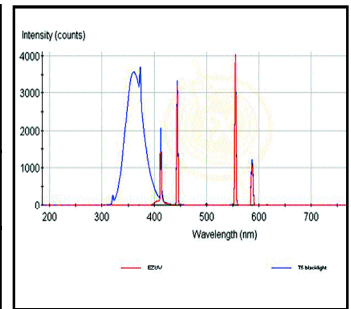

FX® UV Block Coating is an economical and efficient way to eliminate premature degradation of sensitive exhibit items, or to protect environments from the UV spectrum. This highly transparent coating blocks UV radiation at 400nm. FX can provide the substrate or coat your material. Please contact us to determine the best application method and to ensure product warranty.

Applications

Installations required to block UV radiation. Call FX for further information on fixtures suitable for FX UV Block coating. Specify Indoor or Outdoor use.

Substrates

We can coat yours or ours. Specify one of the following:

Heat Strengthened Borosilicate is available in 1.75-2.2mm thick and 2" to 12" sizes.

Tempered Soda Lime Silicate is available in .125" thick and up and 1" to 24" sizes.

Plastic Sheets and Shapes. Our stock includes 2mil, 5 mil, 20mil and 30mil Sheets.

T-5, T-8, T-12 fluorescent sleeves.

Specifying FX® UV Block for your project

All FX products are custom manufactured for the specified lighting instrument. Contact Special FX Lighting by phone, fax, or email with project specifications and fixture information which will be reviewed to recommend the longest lasting, most cost-effective product for your application.

Order Lead-time

Average order lead-time for FX supplied material is two weeks.

Lead-time for tempered material is three-four weeks.

Custom coating of your substrate- Contact factory.



**435.635.0239 - VOICE 435.635.3929 - FAX INFO@FXLIGHT.COM - EMAIL WWW.FXLIGHT.COM - WEBSITE
293 N. 2260 W. PO Box 177 HURRICANE UT 84737**